



#### ■ Features :

- Constant current design
- Wide input range 180~528VAC
- · Built-in active PFC function
- High efficiency up to 90.5%
- Protections: Short circuit / Over voltage / Over temperature
- Cooling by free air convection
- OCP point adjustable through output cable or internal potentiometer
- IP67 / IP65 design for indoor or outdoor installations
- Three in one dimming function (0~10Vdc or 10V PWM signal or resistance)
- Suitable for LED lighting and street lighting applications
- Compliance to worldwide safety regulations for lighting
- Suitable for dry / damp / wet locations
- 5 years warranty (Note.7)





HVGC-65-350 A : IP65 rated. Constant current level can be adjusted through internal potentiometer.


B: IP67 rated. Constant current level adjustable through output cable with 0~10Vdc or 10V PWM signal or resistance.

D (option): IP67 rated. Timer dimming function, contact MEAN WELL for details.


# **SPECIFICATION**

MODEL		HVGC-65-350	HVGC-65-500	HVGC-65-700	HVGC-65-1050							
	RATED CURRENT	350mA	500mA	700mA	1050mA							
	CURRENT ACCURACY	±5.0%										
	OUTPUT VOLTAGE RANGE Note. 4	18 ~ 186V	13 ~ 130V	9~93V	6 ~ 62V							
	RATED POWER	65.1W	65W	65.1W	65.1W							
OUTDUT	RIPPLE & NOISE (max.) Note.2	1Vp-p	0.7Vp-p	0.5Vp-p	0.3Vp-p							
OUTPUT	CURRENT AR L RANGE	Can be adjusted by internal pote	entiometer A type only									
	CURRENT ADJ. RANGE	210 ~ 350mA	300 ~ 500mA	420 ~ 700mA	630 ~ 1050mA							
	OFTUD DIOF TIME	500ms, 80ms / 230VAC 400ms, 80ms / 347VAC / 480VAC at full load										
	SETUP, RISE TIME	B type 500ms, 80ms / 230VAC 500ms, 80ms / 347VAC / 480VAC at 95% load										
	HOLD UP TIME (Typ.)	16ms / 347VAC 30ms / 480	OVAC at full load									
	VOLTAGE RANGE Note.3	180 ~ 528VAC 254VDC ~ 7	747VDC									
	FREQUENCY RANGE	47 ~ 63Hz										
	POWER FACTOR (Typ.)	PF≥0.98/230VAC, PF≥0.97/277VAC, PF≥0.95/347VAC, PF≥0.93/480VAC at full load (Please refer to "Power Factor Character										
		Total harmonic distortion will be	lower than 20% when output load	ding is 60% or higher at 230VAC /	277VAC / 347VAC							
INPUT	TOTAL HARMONIC DISTORTION	Total harmonic distortion will be	lower than 20% when output load	ding is 75% or higher at 480VAC								
	EFFICIENCY (Typ.)	90%	90.5%	90.5%	90%							
	AC CURRENT (Typ.)	0.22A / 347VAC	30VAC									
	INRUSH CURRENT (Typ.)	COLD START 25A(twidth=420µs measured at 50% lpeak) at 480VAC										
	LEAKAGE CURRENT	<0.75mA / 480VAC										
	SHORT CIRCUIT	Constant current limiting, recovers automatically after fault condition is removed										
DDOTECTION	OVERVOLTAGE	195 ~ 210V	137 ~ 150V	98 ~ 107V	65 ~ 72V							
PROTECTION	OVER VOLTAGE	Protection type: Shut down o/p voltage with auto-recovery or re-power on to recovery										
	OVER TEMPERATURE	Shut down o/p voltage, recovers automatically after temperature goes down										
	WORKING TEMP.	-40 ~ +70°C (Refer to "Derating Curve")										
	WORKING HUMIDITY	20 ~ 95% RH non-condensing										
ENVIRONMENT	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH										
	TEMP. COEFFICIENT	$\pm 0.03\%^{\circ}$ C (0 ~ 60°C)										
	VIBRATION	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes										
	SAFETY STANDARDS Note.5	UL8750, CSA C22.2 No. 250.0-13, ENEC EN61347-1, EN61347-2-13, EN62384, independent, IP65 or IP67 approved										
SAFETY &	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC										
EMC	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M	Ohms/500VDC/25°C/70% RI	1								
LINIO	EMC EMISSION	Compliance to EN55015, EN610	000-3-2 Class C (≧60% load) ; E	EN61000-3-3, FCC part 15 class E	3							
	EMC IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8,11, EN61547, light industry level (surge 4KV), criteria A										
	MTBF	202.7K hrs min. MIL-HDBK-2	217F (25°C)									
OTHERS	DIMENSION	189*61.5*36.8mm (L*W*H)										
	PACKING	0.77Kg; 18pcs/14.9Kg/0.89CUF										
NOTE	Ripple & noise are measure     Derating may be needed ure     Please refer to "DRIVING Notes and EMC design refered."     The power supply is considered.	ly mentioned are measured at 347VAC input, rated load and 25°C of ambient temperature.  Indicate at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 2.2uf parallel capacitor, ander low input voltages. Please check the static characteristics for more details.  IETHODS OF LED MODULE".  Indicate a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets can on how to perform these EMC tests, please refer to "EMI testing of component power supplies."										
	· · · · · · · · · · · · · · · · · · ·											



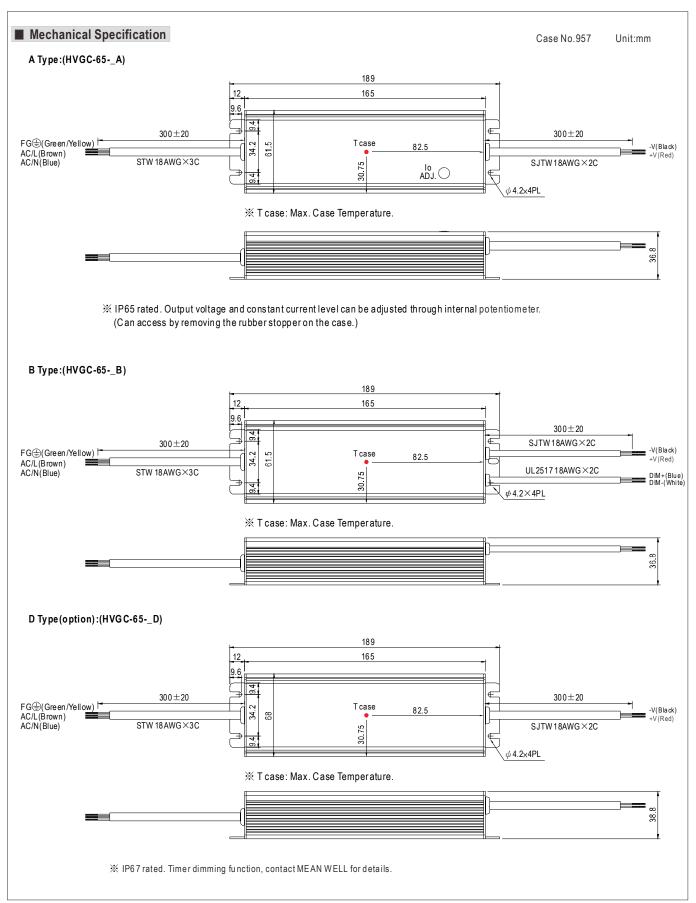




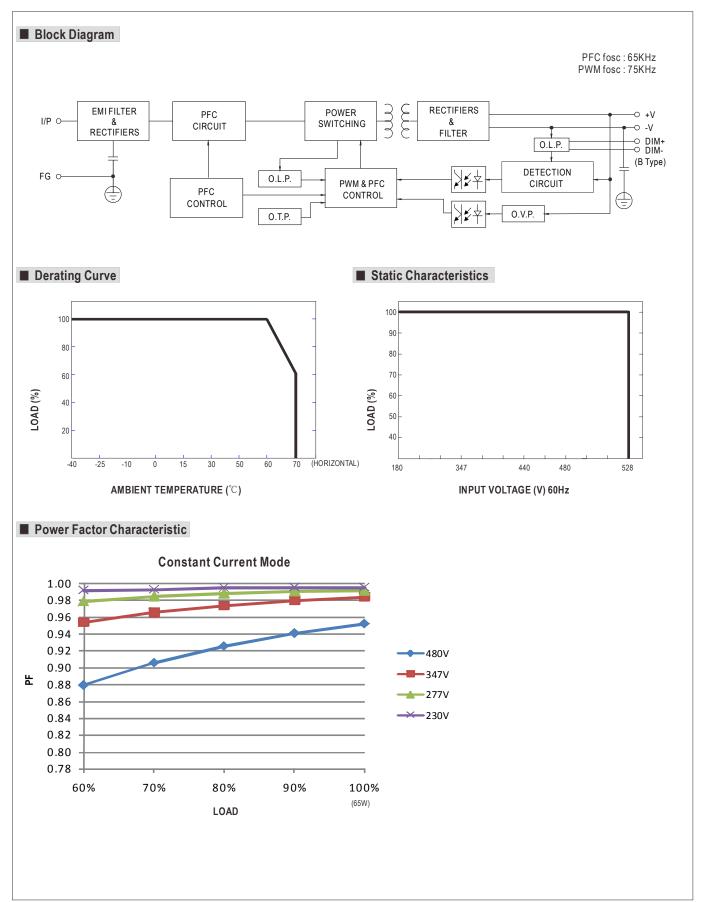



## ■ EFFICIENCY vs LOAD (HVGC-65-700 Model)


HVGC-65 series possess superior working efficiency that up to 90.5% can be reached in field applications.

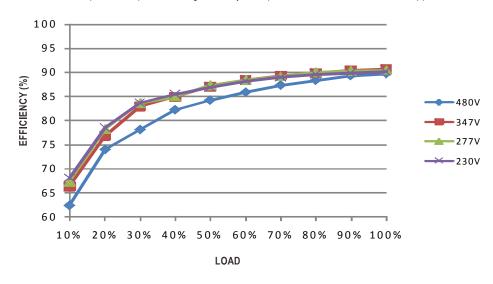

### ■ DRIVING METHODS OF LED MODULE

A typical LED power supply may work in "constant current mode (CC)" to drive the LEDs.

Mean Well's LED power supply with CC characteristic can be operated at CC mode (direct drive, at area).

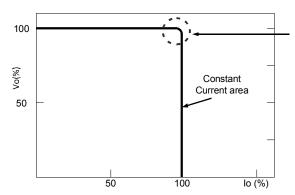


Typical LED power supply I-V curve

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.



## **DIMMING OPERATION (for B-type only)**

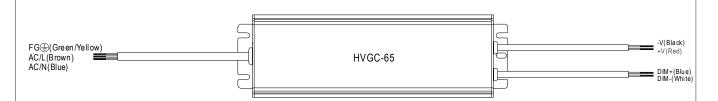

- ※ Please DO NOT connect "DIM-" to "-V".
- \* Reference resistance value for output current adjustment (Typical)

Resistance value	Single driver	Short	10K $\Omega$	20K $Ω$	30K $\Omega$	<b>40K</b> Ω	50K $\Omega$	60K $\Omega$	70K $\Omega$	80K $\Omega$	90K Ω	100 K $\Omega$	OPEN
	Multiple drivers (N=driver quantity for synchronized dimming operation)	Short	10K Ω /N	20K Ω /N	30K Ω/N	40K Ω /N	50K Ω /N	60K Ω /N	70K Ω /N	80K Ω /N	90K Ω /N	100KΩ/N	
Percentage of rated current		0%	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%

※ 0 ~ 10V dimming function for output current adjustment (Typical)

Dimming value	0 V	1V	2V	3V	4V	5V	6V	7V	8V	9 V	10 V	OPEN
Percentage of rated current	0%	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%


¾ 10V PWM signal for output current adjustment (Typical): Frequency range :100Hz ~ 3KHz

Duty value	0%	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN
Percentage of rated current	0%	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%


#### ■ WATERPROOF CONNECTION

O Waterproof connector

Waterproof connector can be assembled on the output cable of HVGC-65 to operate in dry/wet/damp or outdoor environment.

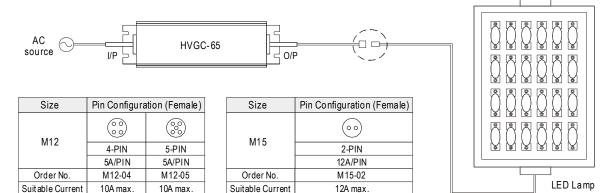



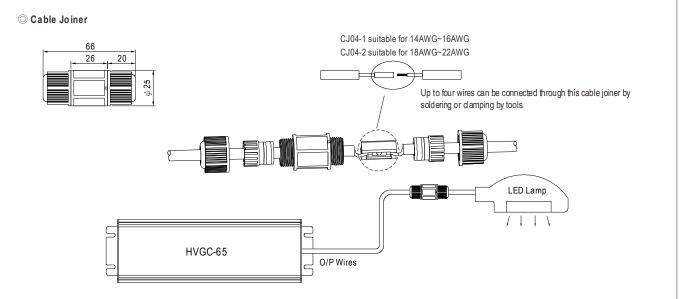

※CJ04 cable joiner can be purchased independently for user's own assembly.

MEAN WELL order No. : CJ 04-1, CJ04-2.