





#### ■ Features

- 180~295VAC input range
- · Built-in active PFC function
- No load power consumption <0.5W</li>
- High efficiency up to 91%
- · Fanless design, cooling by free air convection
- IP67 / IP65 design for indoor or outdoor installations
- Output current adjustable through output cable or internal potentiometer for A-Type
- Built-in 3 in 1 dimming function for B-Type (0~10Vdc or 10V PWM signal or resistance)
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Suitable for dry / damp / wet locations
- Type "HL" for use in class I, Division 2 hazardous(Classified) location luminaires
- 5 years warranty(Note.9)


# Applications

- · LED street lighting
- · LED harbor lighting
- · LED bay lighting
- · LED greenhouse lighting
- Class I, Division 2 hazardous (Classified) location luminaires

## Description

ELG-100 series is a 100W LED AC/DC power supply featuring the constant current output and constant voltage output design with low output voltage. The input accepts the wide range  $180\sim295$ VAC and is equipped with the active PFC function. With the high efficiency up to 91% and the heat-conducted silicone, ELG-100 is able to operate between -40°C and +70°C under free air convection.

### ■ Model Encoding

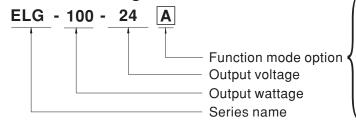

Blank: IP67 rated. Cable for I/O connection

- A: IP65 rated. Output voltage and Constant current level can be adjusted through internal potentiometer
- B: IP67 rated. Constant current level adjustable through output cable with 0~10Vdc or 10V PWM signal or resistance
- D (option): IP67 rated. Smart timer dimming

function, contact MEAN WELL for details.

DA (option): DALI function


### **SPECIFICATION**

MODEL		ELG-100-24	ELG-100-36	ELG-100-42	ELG-100-48	ELG-100-54						
	DC VOLTAGE	24V	36V	42V	48V	54V						
	CONSTANT CURRENT REGION Note.4	12 ~ 24V	18 ~ 36V	21 ~ 42V	24 ~ 48V	27 ~ 54V						
	RATED CURRENT	4.0A	2.66A	2.28A	2A	1.78A						
	RATED POWER	96W	95.76W	95.76W	96W	96.12W						
	RIPPLE & NOISE (max.) Note.2	200mVp-p	250mVp-p	250mVp-p	300mVp-p	350mVp-p						
	,	Can be adjusted by in			1	r r						
	VOLTAGE ADJ. RANGE Note.6	21.6 ~ 26.4V 32.4 ~ 39.6V 37.8 ~ 46.2V 43.2 ~ 52.8V 48.6 ~ 59.4V										
DUTPUT		Can be adjusted by internal potentiometer for A-Type only										
	CURRENT ADJ. RANGE Note.6	2~4A	1.33 ~ 2.66A	1.14 ~ 2.28A	1 ~ 2A	0.89 ~ 1.78A						
	VOLTAGE TOLERANCE Note.3	±3.0%	±2.5%	±2.5%	±2.0%	±2.0%						
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%						
	LOAD REGULATION	±1.0%	±1.0%	±0.5%	±0.5%	±0.5%						
	SETUP, RISE TIME Note.7	500ms, 100ms at 95% lo	1200,0									
	HOLD UP TIME (Typ.)	10ms at 95% load 230VAC										
	( • /	180 ~ 295VAC	-									
	FREQUENCY RANGE	47 ~ 63Hz										
	POWER FACTOR	PF≥0.95/230VAC PF≥0.92/277VAC at full load (Please refer to "Power Factor Characteristic curve")										
	TOTAL HARMONIC DISTORTION	THD< 20% when output loading≥50% at 230VAC input and output loading≥75% at 277VAC input										
NPUT	EFFICIENCY (Typ.)	88%	89%	90%	90%	91%						
	AC CURRENT		277VAC	00,0	0070	0.70						
	INRUSH CURRENT(Typ.)			50% (neak) at 230\/AC								
	MAX. No. of PSUs on 16A	COLD START 60A(twidth=750μs measured at 50% lpeak) at 230VAC  3 units (circuit breaker of type B) / 6 units (circuit breaker of type C) at 230VAC										
	CIRCUIT BREAKER											
	LEAKAGE CURRENT	<0.75mA / 277VAC										
		95 ~ 108%										
	OVER CURRENT	Protection type: Constant current limiting, recovers automatically after fault condition is removed										
	SHORT CIRCUIT	Hiccup mode, recovers automatically after fault condition is removed										
PROTECTION		28 ~ 34V	41 ~ 48V	47 ~ 54V	54 ~ 62V	62 ~ 72V						
	OVER VOLTAGE	Protection type: Shut down o/p voltage, re-power on to recovery										
	OVER TEMPERATURE	Shut down o/p voltage,	re-power on to recove	ery								
	WORKING TEMP.	-40 ~ +70°C (Refer to "Derating Curve")										
	WORKING HUMIDITY	20 ~ 95% RH non-condensing										
ENVIRONMENT	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH										
	TEMP. COEFFICIENT	±0.03%/°C (0 ~ 50°C)										
	VIBRATION	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes										
	SAFETY STANDARDS	,		independent, IP65 or IP67	'approved							
DAFFTY O	WITHSTAND VOLTAGE	(71 ),	,	,	111							
SAFETY &	ISOLATION RESISTANCE	/P-O/P:3.75KVAC  /P-FG:2.0KVAC O/P-FG:1.5KVAC										
EMC	EMC EMISSION			C (≥50% loading); EN610	00-3-3							
	EMC IMMUNITY	· · · · · · · · · · · · · · · · · · ·		1547, light industry level (s								
	MTBF		HDBK-217F (25°€)	,g maddiy lovel (s								
OTHERS	DIMENSION	199*63*35.5mm (L*W*H)										
	PACKING	0.75kg; 16pcs/13kg/0	,									
NOTE	All parameters NOT specially     Ripple & noise are measurer     Tolerance: includes set up tr     Please refer to "DRIVING MI     Derating may be needed unc     A type only.     Length of set up time is mea     The power supply is conside	T specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.  measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.  s set up tolerance, line regulation and load regulation.  RIVING METHODS OF LED MODULE".  seeded under low input voltages. Please check the static characteristics for more details.  ne is measured at cold first start. Turning ON/OFF the power supply may lead to increase of the set up time.  s considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the n, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.										




# ■ Block Diagram

PFC fosc: 50~120KHz PWM fosc: 60~130KHz

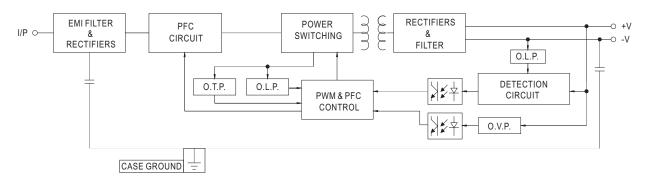


## ■ Derating Curve

## ■ Static Characteristics

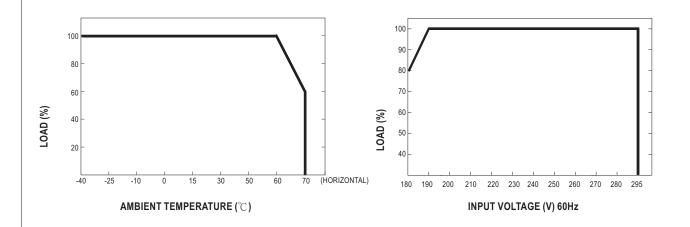




#### ■ Power Factor Characteristic

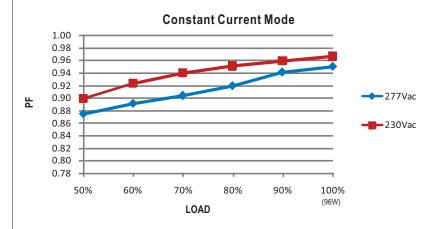


#### ■ EFFICIENCY vs LOAD (48V Model)

ELG-100 series possess superior working efficiency that up to 91% can be reached in field applications.

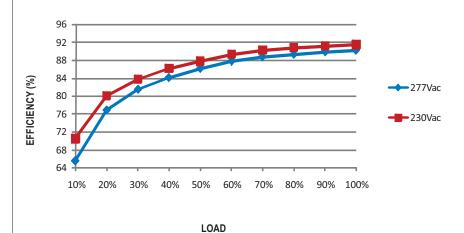

#### ■ DRIVING METHODS OF LED MODULE

This LED power supply is suggested to work in constant current mode area (CV+CC) to drive the LEDs.

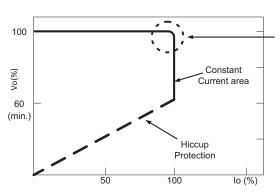

Typical LED power supply I-V curve

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.



### ■ DIMMING OPERATION(for B-Type only)



- ※ Please DO NOT connect "DIM-" to "-V".
- \* Reference resistance value for output current adjustment (Typical)


Resistance value	Single driver	Short	10KΩ	20K Ω	30KΩ	40K Ω	50KΩ	60KΩ	70KΩ	80KΩ	90KΩ	100KΩ	OPEN
	Multiple drivers (N=driver quantity for synchronized dimming operation)	Short	10K Ω /N	20K Ω /N	30K Ω /N	40K Ω /N	50K Ω /N	60K Ω /N	70K Ω /N	80K Ω /N	90K Ω /N	100K Ω /N	
Percentage of rated current		0%	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%

Dimming value	0V	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	OPEN
Percentage of rated current	0%	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%

¾ 10V PWM signal for output current adjustment (Typical): Frequency range: 100Hz ~ 3KHz


Duty value	0%	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN
Percentage of rated current	0%	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%



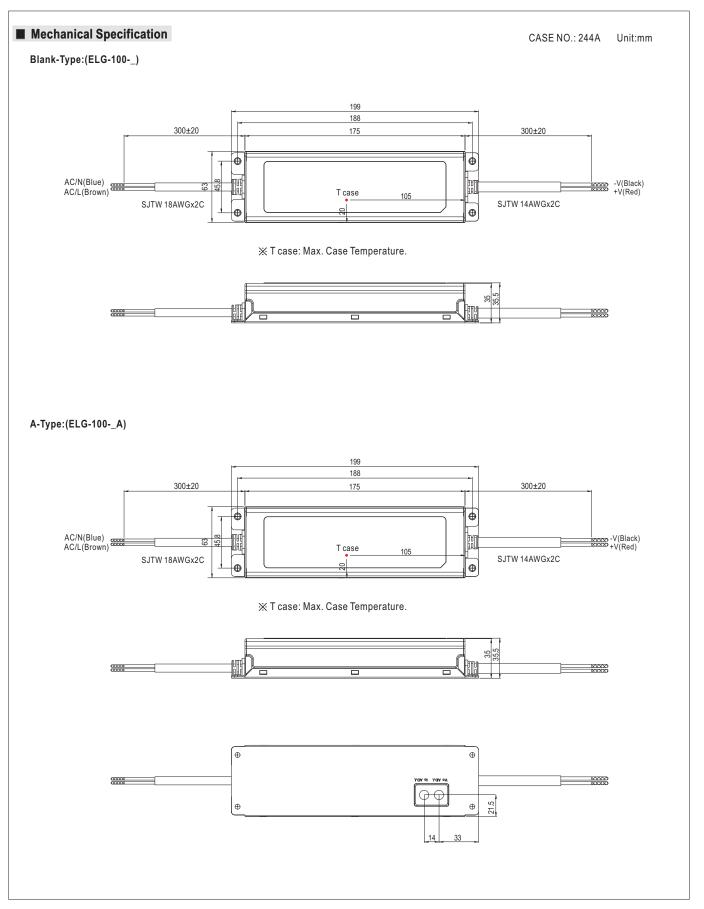



#### B-Type/DA-Type:(ELG-100-\_B/ELG-100-\_DA)

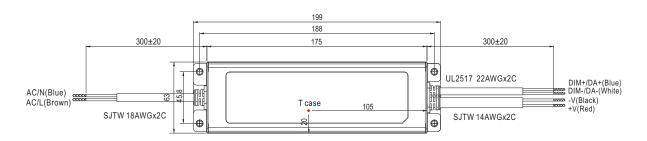

※ T case: Max. Case Temperature.



#### ■ Installation Manual

Please refer to: http://www.meanwell.com/webnet/search/InstallationSearch.html